

Heaters

Propane Heaters

MH12T/MH12TS

- Variable output of 8, 12 and 14,000 BTU/hr.
- Hi-medium-low regulator.
- Safety shut-off and soft nose P.O.L.
- For direct connection to 5-20 lb. bulk cylinder.
- High fire time: 30 hours on 20 lb. cylinder.

Part No. F273100 (Model No. MH12T)

Part No. F273105 (Model No. MH12TS): electric start

MH24T


- Variable output of 8, 12, 16, 24 and 28,000 BTU/hr.
- Hi-medium-low regulator.
- Soft nose P.O.L.
- Run one burner or two.
- For direct connection to 1-20 lb. bulk cylinder.
- High fire time: 15 hours (2 burner operation) on 20 lb. cylinder.

Part No. F273600 (Model No. MH24T)

MH42T

- Variable output of 8, 12, 14, 16, 24, 28, 36 and 8,000 to 42,000 BTU/hr.
- Three safety shut offs.
- Hi-medium-low regulator.
- Soft nose P.O.L.
- Run one, two, or three burners.
- For direct connection to 20 lb. cylinder.
- High fire time: 10 hours on 20 lb. cylinder.

Part No. F273900 (Model No. MH42T)

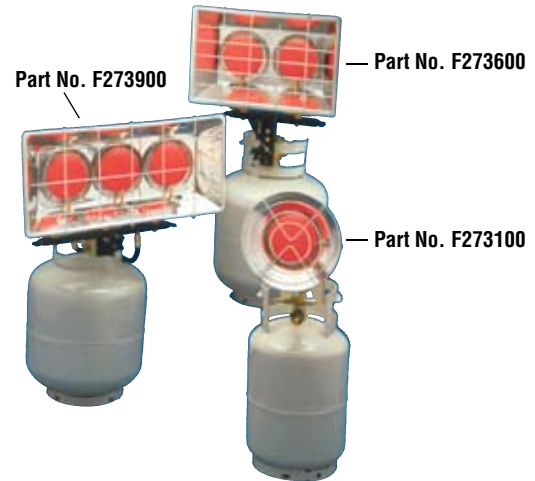

Forced Air Heaters

- Made of rugged quality materials 35,000 to 170,000 BTU/hr. range.
- Fully assembled, ready for use.
- 20' hose and regulator included.
- Propane tank not included.
- Available in 5 models.
- CSA certified.



Part No.	Model No.	BTU/hr.	Ignition Type	Heat capacity	Operates Up To...
F170035	HS35FA	35,000	Piezo	800 sq. ft.	12 hours on 20 lb. cylinder on low
F170055	HS55FAV	30,000 to 55,000	Continuous	1,250 sq. ft.	14 hours on 20 lb. cylinder on low
F170125	HS125FAV	75,000 to 125,000	Continuous	3,000 sq. ft.	11 hours on 40 lb. or larger propane tank
F170170	HS170FAVT	170,000	Automatic solid state	4,000 sq. ft.	17 hours on 100 lb. propane tank, includes thermostat
F272425	HS400FAVT	250,000 to 400,000	Automatic solid state	9,000 sq. ft.	17 hours on 2-100 lb. propane cylinders on low setting

BIG Buddy™ Indoor Safe Propane Heater

- Ergonomic easy-carry handle.
- Blower fan power on/off switch.
- Uses optional A/C adapter or 4 D-cell batteries to power blower fan.
- Large 4-position heat level control knob with built-in piezo starter.
- Integrated hot air blower venting system.
- Attached swing-open doors with swivel-out mount for easy cylinder installation.
- Non-skid surface pads for extra stability.
- Key shaped rear mounting holes for wall mounting.
- Built-in tip over shutoff switch.
- Overall dimensions: 17" L X 10" W X 17.5" H
- CSA certified for indoor & outdoor use.

Part No. F274800 (Model No. MH18B)



Portable Buddy Heater

- Designed and approved for indoor use.
- Uses 1 lb. or 20 lb. propane cylinder with optional hose connection.
- Features 15° offset handle so it's easy to carry.
- Automatic low-oxygen shut off system.
- Free standing or wall mount.
- Quiet, odor-free, lightweight, and portable.
- 4,000 & 9,000 BTU high and low setting.
- Heats up to 200 square feet.
- Accidental tip-over safety shut-off.
- Overall dimensions: 14" L x 7" W x 14" H
- CSA certified.

Part No. F273400 (Model No. MH9B)



Radiant Portable Heater

- Heats up to 800 sq. ft.
- No electricity required - heats during power outages.
- Clean burning, quiet and odorless.
- Operates on standard 20 lb. cylinder.
- Includes fold-down handle and 3.5" solid rubber tires for easy transport.
- Fully assembled and ready to use.
- Tip-over switch, safety shutoff, P.O.L. connections with 12' hose and regulator included.
- CSA certified.

Part No. F170700 (Model No. HS35LP)



Heaters / Hose Assemblies / Brass Fittings & Accessories

Garage Heater

- Heats up to 500-600 sq. ft. (2.5 car garage).
- For use with low profile buildings with 7-8 ft. ceilings.
- No electricity required - heats during power outages.
- Includes thermostat.
- All necessary brackets and hardware included.
- Available in propane (22,000 BTU/hr.) or natural gas (25,000 BTU/hr.).
- Total dimensions: 29-3/4" L x 12-1/4" W x 7" D
- CSA certified.



Part No. F125544 (Model No. HS22N) - propane

Part No. F125545 (Model No. HS22L) - natural gas

Convection Heaters

- Standing pilot for increased safety.
- Piezo push button igniter.
- Telescoping chamber for reduced shipping cost.
- 10' hose and regulator included.
- CSA certified.

Part No. F170480 (Model No. HS80CV)

Heats approx. 1900 sq. ft.
Run Time: 14 hrs.
on 20 lb. cylinder (low)

Part No. F170600 (Model No. HS200CV)

Heats approx. 4700 sq. ft.
Run Time: 29 hrs.
on 100 lb. cylinder (low)



Part No. F170480

Hose Assemblies

Part No.	Description	Assembly
F273701	5' Propane	Swivel 1" -20 male throwaway cylinder thread x P.O.L. with handwheel
F273702	12' Propane	Swivel 1" -20 male throwaway cylinder thread x P.O.L. with handwheel
F273707	5' Propane	1/4" Male pipe thread x 3/8" female flare
F273717	5' Propane	1/4" Male pipe thread x 1/4" female pipe thread
F276124	5' Propane	3/8" Male pipe thread x 3/8" female pipe thread
F276148	5' Propane appliance ext.	9/16" Female pipe x 9/16" female



Part No. F273701



Part No. F273707



Part No. F273717



Part No. F276148

Brass Fittings

Part No.	Description
F276129	9/16" Left hand male thread x P.O.L.
F276139	1/4" Male pipe thread x P.O.L.
F273117	12" Replacement thermocouple for all Mr. Heaters



Part No. F276129



Part No. F273117

Accessories

Part No.	Description
F276136	Straight low pressure regulator with P.O.L. 3/8" female pipe thread x P.O.L.
F273719	High pressure regulator with P.O.L. Range of 0-60 PSI P.O.L. x 1/4" female pipe thread



Part No. F276136



Part No. F273719